


Model No.: P13KDTAB02TS

Product Specification


| | |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------|
| CPU | Rockchip RK3288, quad-core Cortex-A17, GPU Mail-T764 |
| Frequency | 2.2 GHz |
| RAM | DDR3 2G default/4G (upgradable) |
| Internal Storage | EMMC 8GB default/16G or 32G (upgradable), supports NAND FLASH. |
| Touch panel | Multi-point optical touch. |
| Network Support | With RJ45 port, supports 10/100/1000M Ethernet. Built-in Wifi & BT module, supports Wi-Fi 802.11b/g/n (ac upgradable), BT4.0. |
| Image rotation | Supports 0°, 90°, 180°, 270° manual / automatic rotation and gravity sensing. |
| Clock | Built-in battery power supply. |
| Interface Devices | USB interface camera supports up to 800W pixels. |
| | USB Host x 2, extended USB Host x3, USB OTGx1, IO ports x3. |
| | Extended 3 serial ports supports for external devices connected to the module (NFC module, printer, card reader, etc.) |
| | TF card, supports up to 32GB |
| | HDMI 2.0 output. |
| Audio | MP3,WMA,WAV, APE, FLAC, AAC, OGG,M4A,3GPP |
| Video | H.264, MPEG2, VP6, VP8, MVC 2160P@24FPS. |
| | YouTube online video play, up to 1080P, HTML5, Flash10.1. |
| Picture | Supports PNG,BMP,JPG |
| Power Adapter | Input: AC100-240V.50-60HZ Output: DC12V 3A. |
| Operation System | Google Android 6.0 |
| Language | Multiple languages. |
| System Management | Supports OTA remote upgrade, disk upgrade |
| | Open root privileges |
| | Customizable local or remote server management system. |
| | Supports multiple serial devices, USB devices, IO control devices |

Datasheet - *Permaplay*

Dimension:

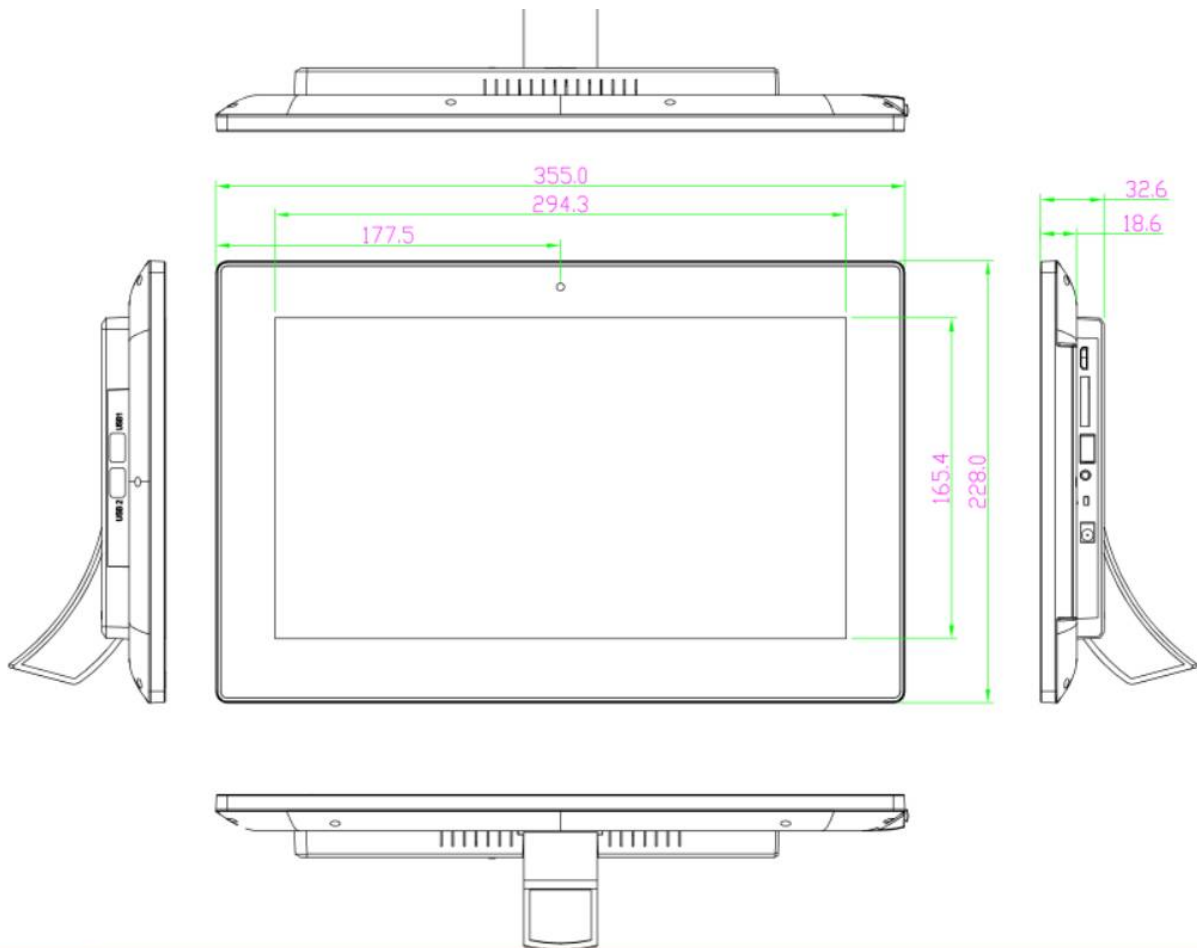

Datasheet - *Permaplay*

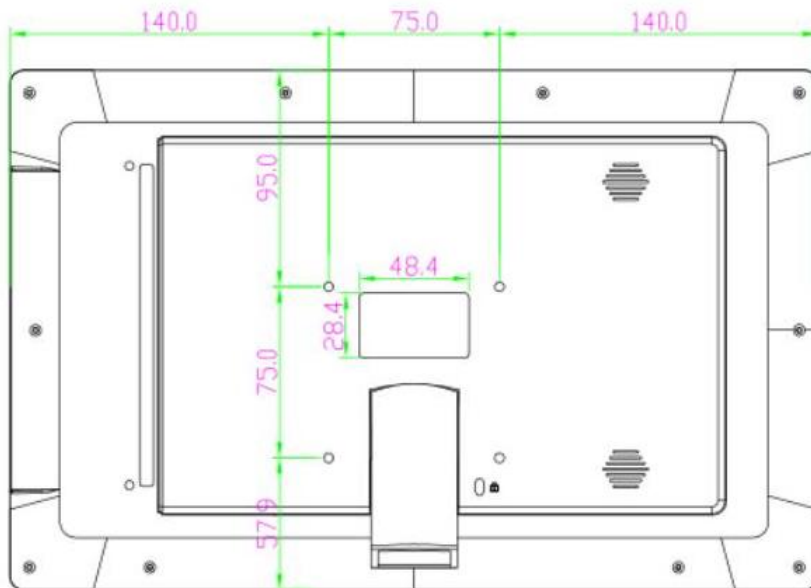

Photos:



Datasheet - *Permaplay*

