

Datasheet - *Permaplay*


Model No.: P32KDTAB02TS

Product Specification

CPU	Rockchip RK3288, quad-core Cortex-A17, GPU Mail-T764
Frequency	2.2 GHz
RAM	DDR3 2G default/4G (upgradable)
Internal Storage	EMMC 8GB default/16G or 32G (upgradable), supports NAND FLASH.
Touch panel	Multi-point optical touch.
Network Support	With RJ45 port, supports 10/100/1000M Ethernet. Built-in Wifi & BT module, supports Wi-Fi 802.11b/g/n (ac upgradable), BT4.0.
Image rotation	Supports 0°, 90°, 180°, 270° manual / automatic rotation and gravity sensing.
Clock	Built-in battery power supply.
Interface Devices	USB interface camera supports up to 800W pixels. USB Host x 2, extended USB Host x3, USB OTGx1, IO ports x3. Extended 3 serial ports supports for external devices connected to the module (NFC module, printer, card reader, etc.) TF card, supports up to 32GB HDMI 2.0 output.
Audio	MP3,WMA,WAV, APE, FLAC, AAC, OGG,M4A,3GPP
Video	H.264, MPEG2, VP6, VP8, MVC 2160P@24FPS. YouTube online video play, up to 1080P, HTML5, Flash10.1.
Picture	Supports PNG,BMP,JPG
Power Adapter	Input: AC100-240V.50-60HZ Output: DC12V 3A.
Operation System	Google Android 7.1
Language	Multiple languages.
System Management	Supports OTA remote upgrade, disk upgrade Open root privileges Customizable local or remote server management system. Supports multiple serial devices, USB devices, IO control devices

Datasheet - *Permaplay*

Dimension:

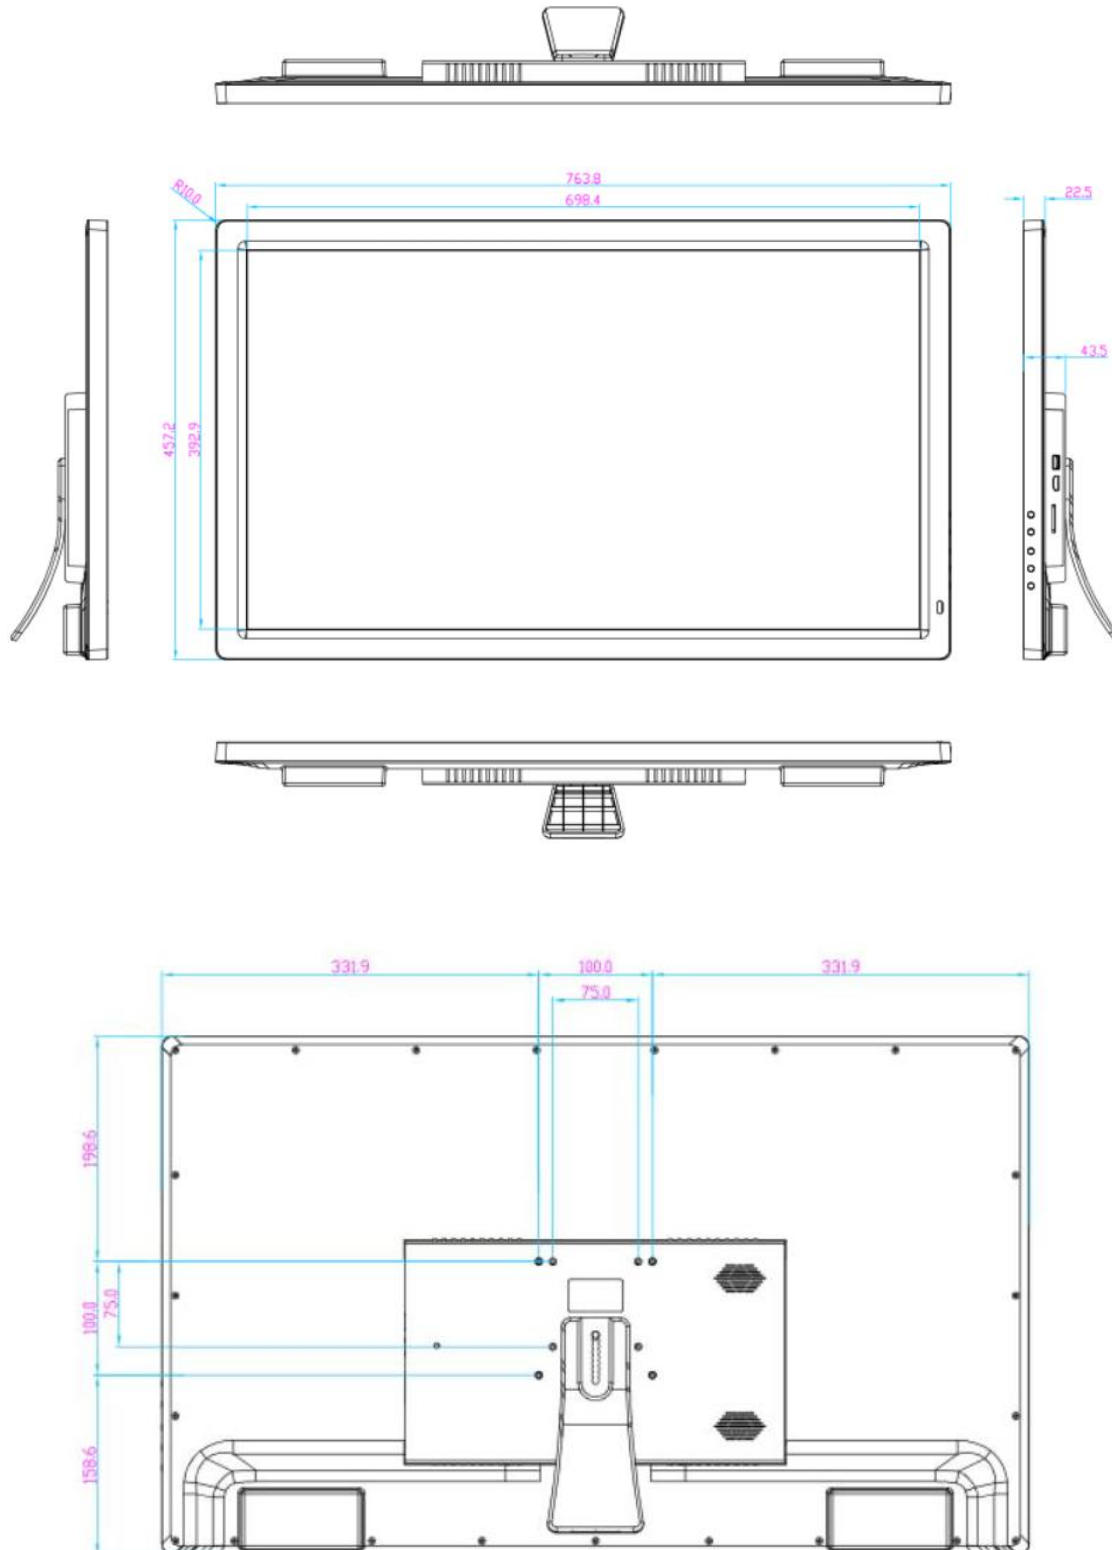

Datasheet - *Permaplay*

Photos:

